




**RUBBERSHIELD® SPRAY**

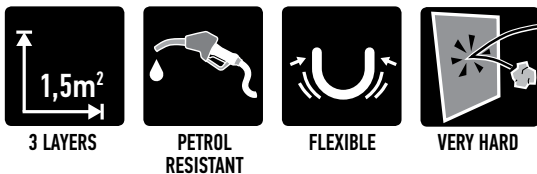

**RUBBERSHIELD®** is a revolutionary scratch and petrol resistant coating. It is designed to finish surfaces which are coated first with RUBBERcomp® rubber coating. RUBBERSHIELD® laminates and bonds efficiently with the previous rubber layer. RUBBERSHIELD® remains flexible and stretchy over time, and will not crack or become brittle in extreme weather conditions. The hardness, scratch resistance and the solvent resistance of RUBBERSHIELD® coating can be compared to original automotive 2-component clear coats. Tested and proven in temperatures from -30°C to +90°C.

**MATERIAL**

Use only on surfaces coated with RUBBERcomp®! | Nur für RUBBERcomp. Oberflächen verwenden! | Používejte jenom na površích ošetřených RUBBERcomp®! | Solo para uso con superficies recubiertas con RUBBERcomp®! | Utiliser exclusivement sur des surfaces revêtues de RUBBERcomp®! | Használja csak a RUBBERcomp®-al bevont befűtetekre! | Utilizzare soltanto su superfici ricoperte con RUBBERcomp®! | Alleen voor gebruik op oppervlakken gecoat met RUBBERcomp®! | Używać tylko na powierzchniach pokrytych RUBBERcomp®! | Aplique apenas em superficies revestidas com RUBBERcomp®! | Utilizați numai pe suprafețe acoperite cu RUBBERcomp®! | Používejte len na povrchoch ošetrených RUBBERcomp®! | Käytä vain RUBBERcomp®-la maalatuille pinnolle. | Använd endast på ytor behandlade med RUBBERcomp®! | Исполняйте само върху поверхности, покрити с RUBBERcomp®! | Brug kun til overflader, der er belagt med RUBBERcomp®! | Kasutada ainult RUBBERcomp®-ga kaetud pindadel! | Χρησιμοποιήστε μόνο σε επιφάνειες επεξευγμένες με RUBBERcomp®! | Naudoti tik ant RUBBERcomp® dengių paviršių! | Lietot tikai virsmām, kas pārklātas ar RUBBERcomp®! | Bruk kun på overflater belagt med RUBBERcomp®! | Только для поверхностей, обработанных Rubbercomp®! | Valnizza RUBBERcomp® ile kaplanmış yüzeylerde kullanın!



**BINDER**  
Special solvent compound

**DEGREE OF GLOSS (DIN 67530 60°)**  
matt 0-25 gloss units  
gloss 80-100 gloss units

**HEAT RESISTANCE:** 90 °C  
**STORAGE STABILITY:** 36 months

**EU VOC-CONTENT:**  
VOC 637,39 g/L

**RECOAT:** always, 15 minutes in between layers

**SIZE:** 400ml

**SALES QTY:** 6 pcs

**HARDNESS**







Hardness | Твърдост | Tvrdost | Härte | Hårdhed | Kõvadus | Durezza | Kovuus | Solidité | Σκληρότητα | Keménység | Durezza | Tvirtumas | Cietība | Hardheid | Hardhet | Twardość | Durezza | Duritate | Твердость | Hårdhet | Tvrdost | Sertlik



Information valid at 20°C, relative air humidity 20% - 70%






# RUBBERshield® 400ml - EU

**MASTON****EU LANGUAGES:** EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK

Art Nr	RUBBERshield 400 ml - EU	RAL	Barcode
1950082-EU	Spray RUBBER Shield FlipFlop Blue-Green 400ml		6412490036447
1950083-EU	Spray RUBBER Shield FlipFlop Cyan-Violet 400ml		6412490036454
1950085-EU	Spray RUBBER Shield FlipFlop Red-Olive 400ml		6412490036461
1950096-EU	Spray RUBBER Shield Silver-Blinky 400ml		6412490036478
1950331-EU	Spray RUBBER Shield Transparent matt400ml		6412490036492
1950332-EU	Spray RUBBER Shield Transparent gloss400ml		6412490036508

# RUBBERshield® 400ml

**OTHER:** EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR

Art Nr	RUBBERshield 400 ml	RAL	Barcode
1950082	Spray RUBBER Shield FlipFlop Blue-Green 400ml		6412490032647
1950083	Spray RUBBER Shield FlipFlop Cyan-Violet 400ml		6412490032654
1950085	Spray RUBBER Shield FlipFlop Red-Olive 400ml		6412490032661
1950096	Spray RUBBER Shield Silver-Blinky 400ml		6412490032678
1950331	Spray RUBBER Shield Transparent matt 400ml		6412490032692
1950332	Spray RUBBER Shield Transparent gloss 400ml		6412490032708